

MULTI-STRIP LAYERED WOODEN FLOOR BOARD

Pattern 1



Pattern 2



The mark of  
responsible forestry  
FSC® C021347



PRODUCT SPECIFICATION


|                |               |
|----------------|---------------|
|                |               |
| Product number | 926567        |
| Catalog number | -             |
| EAN Code       | 5906737926567 |

| MATERIAL/APPEARANCE                                                                |                                                                                                                                   |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Product description:                                                               | Product consists of three layers: surface layer – oak, middle and bottom layer - pine                                             |
| Top layer:                                                                         | A board with three rows of lamellas on the top layer (regularly alternating vertically and horizontally). Family+ class           |
| Finish surface layer:                                                              | 5 layers of acrylic ultra matt lacquer UV hardened (3 layers of primer lacquer - 2 layers of UV hardened surface ceramic lacquer) |
| The connection system boards:<br>(for each package includes instructions assembly) | Cross edge - Barlock 5Gc system, transverse lock insert - Plywood                                                                 |

| CHARACTERISTICS OF THE SURFACE LAYER                                                                          |                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Surface appearance                                                                                            | Yellow-brown oak wood with natural features characteristic for this kind. The floor is characterized by grain variability and similar colours. It darkens under the influence of UV rays. Top layer structured by brushing. |
| Hardness oak applied to the top layer of the board. The method according EN 13489 – testing Brinell (EN 1534) | Average hardness 37 MPa                                                                                                                                                                                                     |

Dimensional characteristics and acceptable deviations (consistent with standard PN-EN 13489).  
Dimensional characteristics and dimensional tolerances, marked at the time of leaving the manufacturer's facility, given in accordance with the type of multi-layer flooring elements.

| DIMENSIONS OF AN INDIVIDUAL ELEMENT                        |                                 |
|------------------------------------------------------------|---------------------------------|
| Dimensions (mm)                                            | Tolerances                      |
| Thickness: 14                                              | Gap (between elements) ≤ 0,2 mm |
| Length: 2200                                               | +/-0,1%                         |
| Width: 207                                                 | +/- 0,2mm                       |
| Width of the modules at the ends of the board: 338 and 221 | +/- 2 mm                        |

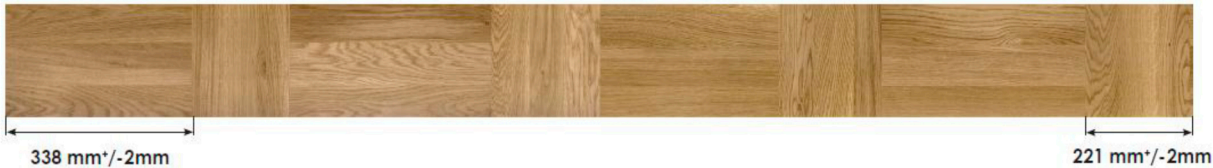

Thicknesses boards measured in according with EN 13647

| THICKNESSES BOARD MEASURED IN ACCORDING WITH EN 13647 |         |
|-------------------------------------------------------|---------|
| Surface layer:                                        | 3,2 mm  |
| Middle and bottom layer:                              | 10,8 mm |

| PACKAGE                     |                                         |
|-----------------------------|-----------------------------------------|
| Number of boards on a pack: | 7pcs. x 2200 mm                         |
| Pack:                       | 3,18m²/ pack., 40pack./pallet = 127,2m² |

| CHARACTERISTICS/ INSTALLATION INSTRUCTIONS/ WARRANTY |                                                                              |
|------------------------------------------------------|------------------------------------------------------------------------------|
| Humidity board:                                      | 7% +/- 2%                                                                    |
| Installation on underfloor heating system:           | Product designed in the system of electric and water floor heating solution. |
| Warranty:                                            | 30 years residentail, 5 years commercial                                     |

| DESCRIPTION OF SURFACE LAYER*                          |                                                       |
|--------------------------------------------------------|-------------------------------------------------------|
| Classification of the surface layer according EN 13489 | Free class                                            |
| Classification of the surface layer                    | Family + class                                        |
| Healthy knots                                          | Acceptable up to 30 mm in diameter                    |
| Unhealthy knots with fillin, scattered                 | Acceptable up to 15 mm in diameter                    |
| Unhealthy holes from knots                             | Acceptable up to 10 mm in diameter                    |
| Bark pockets                                           | Unacceptable                                          |
| Colour scheme of surface layer                         | Similar                                               |
| Arrangement of fibres                                  | Varied                                                |
| Silver grains                                          | Acceptable , without limit                            |
| Sapwood                                                | Acceptable edge sapwood on a single strip up to 10 mm |
| Filling cracks in filled                               | Unacceptable                                          |
| Biodegradation of surface layer                        | Unacceptable                                          |

\* According to the EN 13489 standard, 3% of different grade than indicated is acceptable. The limits of characteristic features of the product concern the upper layer of the element. The knots' fillings, especially in case of brushed surfaces, can be characterized by gaps which a deliberate effect of this kind of decorative surface. Measurement of wood characteristics according to EN 1310 standard.

| CARE OF LACQUERED FLOORS                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PROTEKTOR CONCENTRATE</b> -<br>Agent for everyday floor care                           | PROPERTIES: Concentrated floor cleaning agent with natural care additives. Deep cleans without smudging. Refreshes the floor and protects it against dirt.<br>APPLICATION: For all types of lacquered wooden floors. May also be used for other lacquered surfaces, e.g. furniture or worktops in rooms, as well as for laminated floors. <ul style="list-style-type: none"><li>• Yield approx. 500m² /1 L</li></ul>                                                                                                                                                                                                                                        |
| <b>PROTEKTOR COMPLETE</b><br>Agent for thorough periodic cleaning of the floor            | PROPERTIES: Liquid agent for cleaning all lacquered wooden surfaces.<br>APPLICATION: For all indoor lacquered wooden floors. <ul style="list-style-type: none"><li>• Yield approx. 200m²/l</li></ul> IMPORTANT:<br>ALWAYS USE PROTEKTOR COMPLETE BEFORE APPLYING PROTEKTOR SHINE                                                                                                                                                                                                                                                                                                                                                                            |
| <b>PROTEKTOR SHINE</b><br>Agent for protecting and regenerating the floor's lacquer layer | PROPERTIES: Protects a new lacquered floor from penetration by dirt and dust using a type of microfilm applied across the whole floor and on all the joints between floorboards. Eliminates minor scratches in the damaged layer of lacquer.<br>APPLICATION: For all indoor lacquered wooden floors. <ul style="list-style-type: none"><li>• yield approx. 100m²/ 1L</li></ul> IMPORTANT: BEFORE APPLYING PROTEKTOR SHINE, ALWAYS CLEAN THE FLOOR WITH PROTEKTOR COMPLETE. PROTEKTOR SHINE GENTLY INCREASES THE POLISH OF THE LACQUERED SURFACE BY SEVERAL DEGREES. DO NOT LEAVE EXCESS PROTEKTOR SHINE IN THE CREVICES OF BRUSHED AND BEVELLED FLOORBOARDS |



The mark of  
responsible forestry  
FSC® C021347





RECOMMENDED FREQUENCY OF FLOOR MAINTENANCE

|                                                                                              | Protector Concentrate | Protector Complete  | Protector Shine       |
|----------------------------------------------------------------------------------------------|-----------------------|---------------------|-----------------------|
| Intensity of use                                                                             | Everyday cleaning     | Periodic cleaning   | Periodic regeneration |
| Floors in rooms which are not intensively used, e.g. living rooms, bedrooms                  | Every 5-7 days        | Every 6-12 months   | Visually inspect      |
| Floors in areas which are used with average intensity, e.g. stairs, corridors, office spaces | Every 3-5 days        | Every 3-6 months    | Visually inspect      |
| Floors in places which are intensively used, e.g. restaurants, shops, schools                | Every 1-3 days        | 1-2 times per month | Visually inspect      |

IMPORTANT:

The floor should be cared for using only agents intended for this purpose.

CARE OF LACQUERED FLOORS

The engineered wood flooring should be cared for using only agents intended for this purpose.

ATTENTION: Before applying any third party care product be sure to test it on a concealed area of the floor to assess whether or not there is a negative reaction of lacquer on the floorboard (for example, discoloration or peeling). Regular care of lacquer floors conceals minor wear and tear of everyday use. The greatest enemies of wooden floors are water and sand. In case of soiling of the floor, these should be carefully and gently removed.

NOTE: Floorboards are produced exclusively from genuine wood. Because of the natural variation in the raw material, the individual floorboards and their surface may differ in color, shade, the intensity of knots and grain pattern. Sample boards, samples, photo- graphs and merchandising brochures may not fully correspond to the actual appearance of the products. The color of the product delivered may be different from the material available at the point of sale.