


HAUSSMAN

ENGINEERED WOOD – HDF panel – Herringbone –
14mm thick – 90 x 595 mm



14 MM

*including 3,5 mm
top layer*




GO4



Technical features

Panel	HDF
Layers	3
Texture	Brushed matt varnish
Logistics	Dimensions : 595 x 90 mm
	1 kit = 8 planks = 0.428 sqm
	sqm/pallet = 47.891 sqm
	1 pallet = 112 kits
	kg/kit = 4.93 kg
Warranty	kg/pallet = 566.78 kg
	25 years
	Number of designs 6
Fire resistance	Dfl-S1

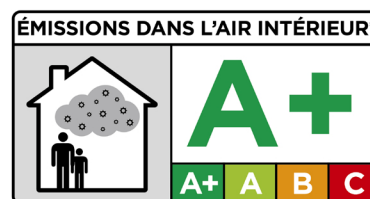

* A VOC rating expresses the amount of volatile material in the interior air which may present a health hazard when inhaled. It is measured on a scale from A+ (very low emissions) to C (high emissions)

HAUSSMAN

COLOURS



P122 Chêne Aurore

Selection

Ref : 6O4762

EAN : 3442726O47629

Original

Ref : 6O3649

EAN : 3442726O36494

or Nuanced Authentic

Ref : 6O3164

EAN : 3442726O31642



P131 Chêne Naturel

Selection

Ref : 6O4763

EAN : 3442726O47636

Original

Ref : 6O3648

EAN : 3442726O36487

or Authentic

Ref : 6O3654

EAN : 3442726O36548



P132 Chêne Blanchi

Selection

Ref : 6O2235

EAN : 3442726O22350

Original


Ref : 6O3650

EAN : 3442726O36500

or Nuanced Authentic

Ref : 6O3801

EAN : 3442726O38016

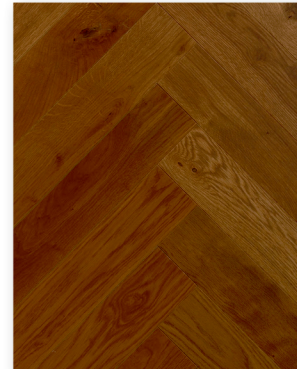

P300 Chêne Safari

Selection

Ref : 6O4765

EAN : 3442726O47650

Nuanced Original

Ref : 6O3653

EAN : 3442726O36531

or Nuanced Authentic

Ref : 6O3659

EAN : 3442726O36593



P157 Chêne Monarque

Selection

Ref : 6O4764

EAN : 3442726O47643

Nuanced Original


Ref : 6O3652

EAN : 3442726O36524

or Nuanced Authentic

Ref : 6O3658

EAN : 3442726O36586

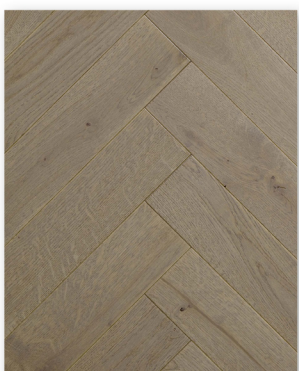

P169 Chêne Opale

Selection

Ref : 6O4766

EAN : 3442726O47667

Original

Ref : 6O3651

EAN : 3442726O36517

or Authentic

Ref : 6O3657

EAN : 3442726O36579

Sapwood is present in the shades available in nuanced colours.

Each plank is unique, the color and structure can not be identical. The application of a dark shade will tend to homogenize the appearance, while a light shade will highlight the singularities of the wood.

HAUSSMAN


ENGINEERED WOOD - Herringbone - HDF panel - 1-Stripe
14mm thick - 90 x 595 mm



PRODUCT FEATURES	Warranty		25 years
	Clic system		X-lock
	Bevels		On the 4 sides
	Low-temperature hot water		Yes
	Electric radiant floor heating RFH		Yes
	Underfloor heating and cooling system UHCS		Yes (glue-down fitting only)
TESTS AND TECHNICAL FEATURES	PEFC (10-31-943) and Greenguard Gold		Yes
	Class of use	EN 685	33 R2
	CE and UKCA labelling		Yes
	Health safety labelling		A+ (*)
	DOP number		H094P35C01/RPC/2013
	Moisture content		≤ 9 %
	Length tolerance		± 0,1 %
	Width tolerance		± 0,2 mm
	Skew tolerance		≤ 0.1% on the width
	Flatness tolerance		(l) ≤ 0.3% on the width
	Flatness tolerance (L)		≤ 1% on the length
	Reaction to fire	EN 14342	Dfl-S1
	Formaldehyde emission	EN 717-1	E1 ≤ 3,5 mg/sqm.h
	Thermal resistance	EN 13489	0,096 (sqm K)/W
DIMENSIONS AND LOGISTICS	Thickness	mm	14
	Length x Width	mm	90 X 595
	Number of planks / box		8
	Area / box	sqm	0.428
	Gross weight / box	kg	4.93
	Number of box / pallet		112
	Area / pallet	sqm	47.891
	Gross weight / pallet	kg	566.78



including 3,5 mm
top layer



* A VOC rating expresses the amount of volatile material in the interior air which may present a health hazard when inhaled. It is measured on a scale from A+ (very low emissions) to C (high emissions)