


SPC PANELS “LIVING” WITH INTEGRATED UNDERLAY XPS

MATERIAL/APPEARANCE

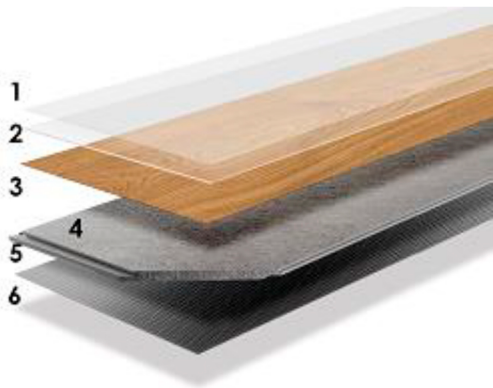

- 1. Surface Layer – super resistant matt lacquer Top Coat.
- 2. Transparent PVC Wear Layer thickness 0,3 mm, textured surface, four-sided microbevel.
- 3. Decorative film.
- 4. Supporting SPC core produced in the extrusion process from calcium carbonate, PVC, and refining additives; Thickness: 3,7 mm.
- 5. I4F locking solution.
- 6. Integrated foam underlay XPS thickness: 1mm. CS load resistance > 400 kPa.

DIMENSIONS OF A SINGLE PANEL ACCORDING TO EN 16511:2023-10

Dimensions of a single panel	Tolerances
Thickness: 5 mm	$t_{max}-t_{min} \leq 0,5 \text{ mm}$
Length: 1234 mm	$l_{max}-l_{min} \leq 0,5 \text{ mm}$
Width: 198 mm	$w_{max}-w_{min} \leq 0,2 \text{ mm}$

THICKNESS OF SEPARATE LAYERS


Surface layer	0,3 mm
Core	3,7 mm
Underlay	1,00 mm

PACKAGE

Surface layer	9 pcs.
Core	2,2 m²/ pack., 40 pack./pallet= 88 m²

PRODUCT CHARACTERISTICS

Installation on underfloor heating system:	Product designed in the system of electric and water floor heating solution, in accordance with the assembly instructions. The maximum allowable temperature on the panel surface is 27°C.
Warranty:	25 years residential, 5 years commercial
Utility class according to EN 16511:2023	23 class residential, 34 class commercial



Floors in areas which are used with average intensity, e.g. stairs, corridors, office spaces	Every 3-5 days	Visually inspect minimum every 3-6 months
Floors in places which are intensively used, e.g. restaurants, shops, schools	Every 1-3 days	Visually inspect At least 1-2 time a month

IMPORTANT: The shelf life of Protektor products is 2 years from the production date shown on the packaging.

IMPORTANT:

The floor should be maintained using only agents intended for this purpose.

* Use of care agents for floors made by manufacturers other than Barlinek may result in staining, discolouration of floors or major changes to their slipperiness and sheen. Barlinek bears no responsibility for the effects of using agents made by other manufacturers. All recommendations regarding the regularity of cleaning and caring for floors are given for reference only and depend on actual intensity of use. For these reasons they may not form the basis for warranty claims. Sand trailed or water spilt on the floor have very undesirable effects on it and it is vital to remove them.

Version number	Date	Made by
EN_PF_V03	12/02/2026	Technical Advice Specialist Product Manager Department
Previous version	Previous versions archived	\\klvfs1\clusterprofile\Pub\Dział_PM\KARTY SPECYFIKACJI TECHNICZNEJ DO POBRANIA

COLLECTION	
	
OAK LIVO SP3IMS-BSTAN-PF3XXX-BLIVX 5906737906835	OAK MINO SP3IMS-BSTAN-PF3XXX-BMINX 5906737906842
	
OAK VERO SP3IMS-BSTAN-PF3XXX-BVERX 5906737906859	OAK CALMA SP3IMS-BSTAN-PF3XXX-BCLMX 5906737906866



	
OAK SANO SP3IMS-BSTAN-PF3XXX-RSAOX 5906737910900	OAK NAVA SP3IMS-BSTAN-PF3XXX-LNVAX 5906737910917
	
OAK LUMO SP3IMS-BSTAN-PF3XXX-RLUMX 5906737910924	OAK YARU SP3IMS-BSTAN-PF3XXX-RYARX 5906737910931



		
OAK ZENO SP3IMS-BSTAN-PF3XXX-NZENX 5906737910948		

MAINTENANCE	
POTEKTOR CONCENTRATE Agent for everyday floor care	PROPERTIES: Concentrated floor cleaning agent with natural care additives. Deep clean without smudging. Refreshes the floor and protects it against dirt. APPLICATION: For all types of lacquered and SPC floors. May also be used for other lacquered surfaces, e.g. furniture or worktops in rooms, as well as for laminated floors. Yield approx. 500m² /1 L
PROTEKTOR COMPLETE Agent for thorough periodic cleaning of the floor	PROPERTIES: Liquid agent for cleaning all lacquered and SPC surfaces. APPLICATION: For all indoor lacquered and SPC floors. Yield approx. 200m²/1 L

RECOMMENDED FREQUENCY OF FLOOR MAINTENANCE*		
Intensity of use	Everyday cleaning PROTEKTOR CONCENTRATE	Periodic cleaning PROTEKTOR COMPLETE
Floors in rooms which are not intensively used, e.g. living rooms, bedrooms	Every 5-7 days	Visually inspect minimum every 6 - 12 months

