

VAUBAN

ENGINEERED WOOD – HDF panel –
1-Stripe – 14mm thick – 90 x 1190 mm




14 MM

*including 3,5 mm
top layer*



Technical features

Panel	HDF
Layers	3
Texture	Brushed matt varnish
Logistics	Dimensions : 1190 x 90 mm
	1 kit = 8 planks = 0.857 sqm
	sqm /pallet = 47.99 sqm
	1 pallet = 56 kits
	kg/kit = 9.68 kg
Warranty	kg/pallet = 542.3 kg
	25 years
	Number of designs 6
Fire resistance	Dfl-S1

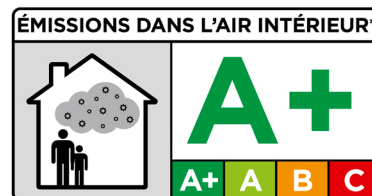

Each plank is unique, the color and structure can not be identical. The application of a dark shade will tend to homogenize the appearance, while a light shade will highlight the singularities of the wood.

VAUBAN

COLOURS



P122 Chêne Aurore

Selection

Ref : 555945

EAN : 3442720215475

Original

Ref : 6O4814

EAN : 3442726O48145

or Nuanced Authentic

Ref : 6O4819

EAN : 3442726O48190



P131 Chêne Naturel

Selection

Ref : 555942

EAN : 3442720215413

Original

Ref : 6O4815

EAN : 3442726O48152

or Authentic

Ref : 6O4820

EAN : 3442726O48206



P132 Chêne Blanchi

Selection

Ref : 555943

EAN : 3442720215437

Original

Ref : 6O4816

EAN : 3442726O48169

or Nuanced Authentic

Ref : 6O4785

EAN : 3442726O47858



P300 Chêne Safari

Selection

Ref : 6O4782

EAN : 3442726O47827

Nuanced Original

Ref : 6O4818

EAN : 3442726O48183

or Nuanced Authentic

Ref : 6O4822

EAN : 3442726O48220



P157 Chêne Monarque

Selection

Ref : 6O4781

EAN : 3442726O47810

Nuanced Original

Ref : 6O4817

EAN : 3442726O48176

or Nuanced Authentic

Ref : 6O4821

EAN : 3442726O48213



P169 Chêne Opale

Selection

Ref : 6O4783

EAN : 3442726O47834

Original

Ref : 6O4784

EAN : 3442726O47841

or Authentic

Ref : 6O4823

EAN : 3442726O48237

Sapwood is present in the shades available in nuanced colours.

Each plank is unique, the color and structure can not be identical. The application of a dark shade will tend to homogenize the appearance, while a light shade will highlight the singularities of the wood.

VAUBAN

ENGINEERED WOOD - HDF panel - 1-Stripe
14mm thick - 90 x 1190 mm



PRODUCT FEATURES	Warranty		25 years
	Clic system		Unifit®
	Bevels		On the 4 sides
	Low-temperature hot water		Yes
	Electric radiant floor heating RFH		Yes
	Underfloor heating and cooling system UHCS		Yes (glue-down fitting only)
TESTS AND TECHNICAL FEATURES	PEFC (10-31-943) and Greenguard Gold		Yes
	Class of use	EN 685	33 R2
	CE and UKCA labelling		Yes
	Health safety labelling		A+ (*)
	DOP number		H094P35C01/RPC/2013
	Moisture content		≤ 9 %
	Length tolerance		± 0,1 %
	Width tolerance		± 0,2 mm
	Skew tolerance		≤ 0.1 % on the width
	Flatness tolerance		(l) ≤ 0.3% on the width
	Flatness tolerance (L)		≤ 1 % on the length
	Reaction to fire	EN 14342	Dfl-S1
	Formaldehyde emission	EN 717-1	E1 ≤ 3,5 mg/sqm.h
	Thermal resistance	EN 13489	0,096 (sqm K)/W
DIMENSIONS AND LOGISTICS	Thickness	mm	14
	Length x Width	mm	90 x 1190
	Number of planks / box		8
	Area / box	sqm	0.857
	Gross weight / box	kg	9.68
	Number of box / pallet		56
	Area / pallet	sqm	47.99
	Gross weight / pallet	kg	542.3



including 3,5 mm
top layer



* A VOC rating expresses the amount of volatile material in the interior air which may present a health hazard when inhaled. It is measured on a scale from A+ (very low emissions) to C (high emissions)