


180

MORE FROM WOOD.



Laminate Flooring

Practical, lasting value, easy to clean.

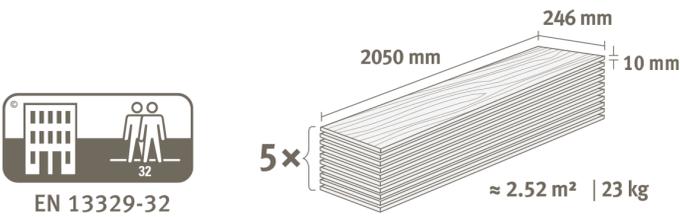

EN 13329-32

20* Long CLIC it! 10 mm

Warning symbols: fire, moisture, and temperature. Temperature range: 40-70% RH > 18°C. Installation time: 48 h.

32

Room suitability icons: living room, bedroom, kitchen, office, bathroom, and stairs. A red 'X' indicates unsuitable areas like outdoors or over radiators.

EUROPEAN LAMINATE MADE WITH WOOD

EPFL

ANTIBACTERIAL

Tested as per ISO 22196. More information.

BLUE ANGEL THE GERMAN ECOLABEL

www.blauer-engel.de/uz176

EU Ecolabel

www.ecolabel.eu

EU Ecolabel: DE/035/003

TÜV PROFICERT

70 720 8151-1

QUALITY TESTED tested for emissions harmful substances EPH PREMIUM

EMMISSION CLASS FOR BUILDING MATERIAL

M1

EMISSIONS DANS L'AIR INTERIEUR

A+

Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

CARB2 compliant

PEFC

PEFC06-38-171

EF2469 11/2020



180



A

A1 A2 A3 A4 A5 A6 A7 A8

CTI: < 2 CM% CA/CAP: < 0.5 CM% *KRL-methode: < 75% RH BS5325 / < 85% RH NT Build 439 / < 80% RH ASTM F2170

CTI: < 1.8 CM% CA/CAP: < 0.3 CM%

Tools and materials: screwdriver, hammer, saw, gloves, etc.

B

B1 B2 B3 B4 B5 B6 B7 B8 B9 B10 B11 B12 B13 B14 B15 B16 B17

Details: www.egger.com

C

DOMESTIC AREA COMMERCIAL AREA

FLOATING INSTALLATION

Option A

C1a C2a C3a C4a C5a C6a C7a C8a

Option B

C1b C2b C3b C4b C5b C6b C7b C8b

Option C

C1c C2c C3c C4c C5c C6c C7c C8c

D

D1 D2 D3 D4 D5 D6 D7 D8 D9 D10 D11

min. 2x2 m COMMERCIAL AREA

< 15 min.

Notices of provisional status
These processing instructions have been carefully drawn up to the best of our knowledge. It is intended for information only and does not constitute a guarantee in terms of product properties or its suitability for specific applications. We accept no liability for any mistakes, errors in standards, or printing errors. In addition, technical modifications may result from the continuous development of EGGER Floorings, as well as from changes to standards and public law documents. Subject to technical modifications and printing errors.

060

060